

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)


PCT

(10) International Publication Number
WO 2005/050818 A1

- (51) International Patent Classification⁷: **H02K 3/26**, 15/085 (74) Agent: COLLINSON & CO; 117 King William Street, Adelaide, S.A. 5000 (AU).
- (21) International Application Number: PCT/AU2004/001601 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 19 November 2004 (19.11.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2003906405 20 November 2003 (20.11.2003) AU
- (71) Applicant (for all designated States except US): INTEL- LIGENT ELECTRIC MOTOR SOLUTIONS PTY LTD [AU/AU]; 11 Manton Street, Hindmarsh, S.A. 5007 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ATKINSON, Donald, Alfred [AU/AU]; 11 Manton Street, Hindmarsh, S.A. 5007 (AU).
- Published:
— with international search report

[Continued on next page]

(54) Title: ELECTRIC MACHINE IMPROVEMENT

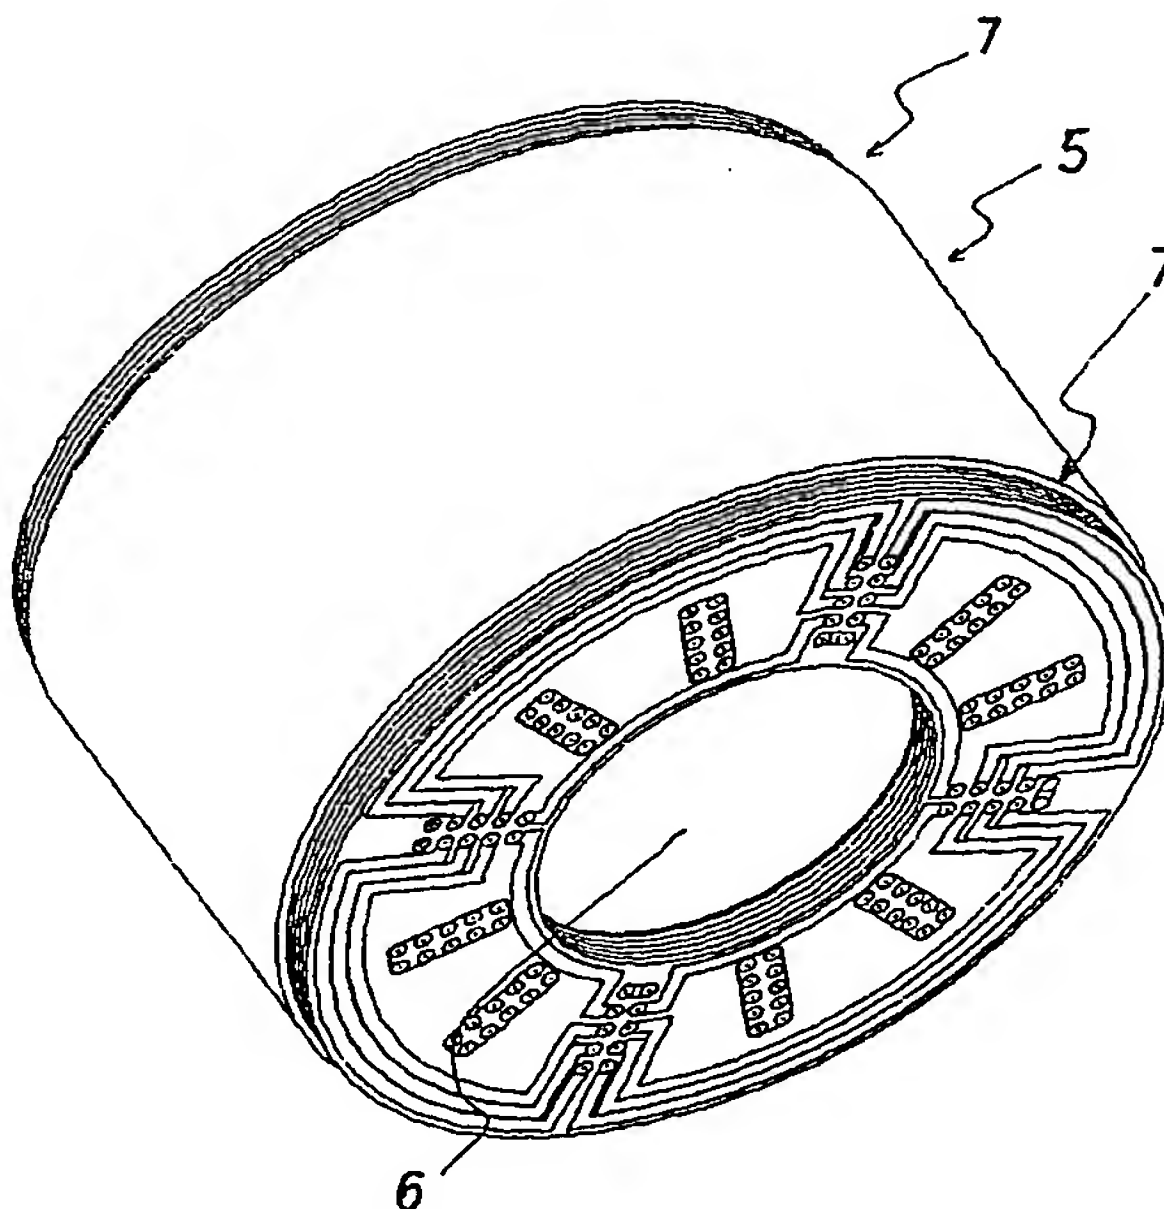

(57) Abstract: An electric machine which includes a magnetically inducible core (60), at least three elongated first, second and third current carrying conductors (64-66) passing through a respective aperture (68) through the core, a first end (15, 69) of the first conductor and a first end of the second conductr are electrically connected by a first bridging member (8) located on a first side of the core, a second end of the second conductor and a second end of the third conductor are electrically connected by a second bridging member (8) located on a second side of the core (figures 4, 5).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.